

## 5000-6000MHz/50Watt/Module

Model Number: MCW5060M47A

The model MCW4700M47A is a high power amplifier operating between 5000MHz and 6000MHz and offering a wide dynamic Range with 50Watts typical saturated power. The employment of gallium nitride(GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio.

### FEATURES:

- Suitable for RF, L&S linear applications
- Small size and light weight
- Unconditional stability and ruggedness
- Built-in control, and protection circuits
- Class AB

### ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω system

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	5000		6000	MHz
RF Output Power	Pout		20		Watt
Power Gain	Gp		47		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S11			-10	dB
Harmonics @20W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switching Speed	TON/OFF		2	5	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	24	28	32	Volt
Power add efficiency	Eff		35		%
Current Consumption @ POUT = 40W	Ibd			9	Amp

### MECHANICAL SPECIFICATION

Parameter	Value	Units	Notes
Dimensions	160x90x25[6.29x3.54x0.98]	mm [inch]	Maximum
Weight	1.5[3.3]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

### ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

### Absolute Maximum Rating

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ POUT =30W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous

\*Chengdu Microwave Technology Co., Ltd\*

>>1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel: +86(28)87872669\*0

>>Fax: +86(28)87882925

>>Mobile/WhatsApp: +86-181 8078 9271

>>E-mail: [info@cdmicrowave.com](mailto:info@cdmicrowave.com)

>>[www.cdmicrowave.com](http://www.cdmicrowave.com)


5000-6000MHz/50Watt/Module

Model Number: MCW5060M47A


DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	ENABLE	Amplifier ENABLE: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT MONITOR	Analog voltage relative to IDD @ 100 mV per Ampere
4	VDD	28VDC
5	VDD	28VDC
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	VDD	28VDC

Functional Diagram

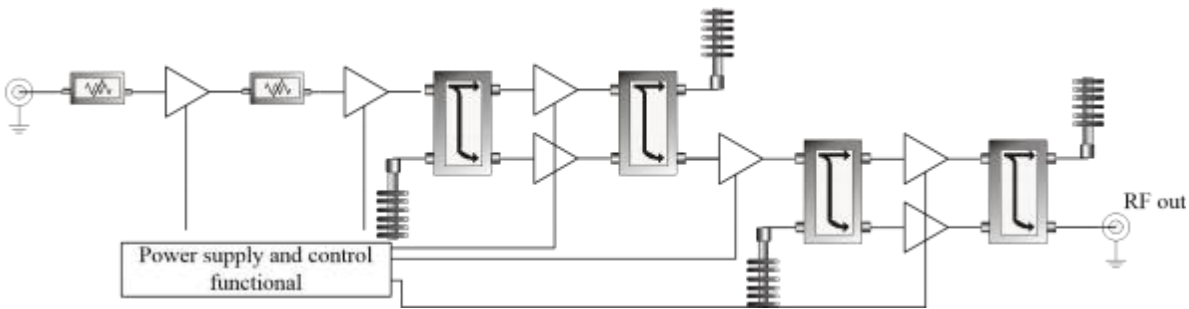


OUTLINE DRAWING (All dimensions in mm[inch])

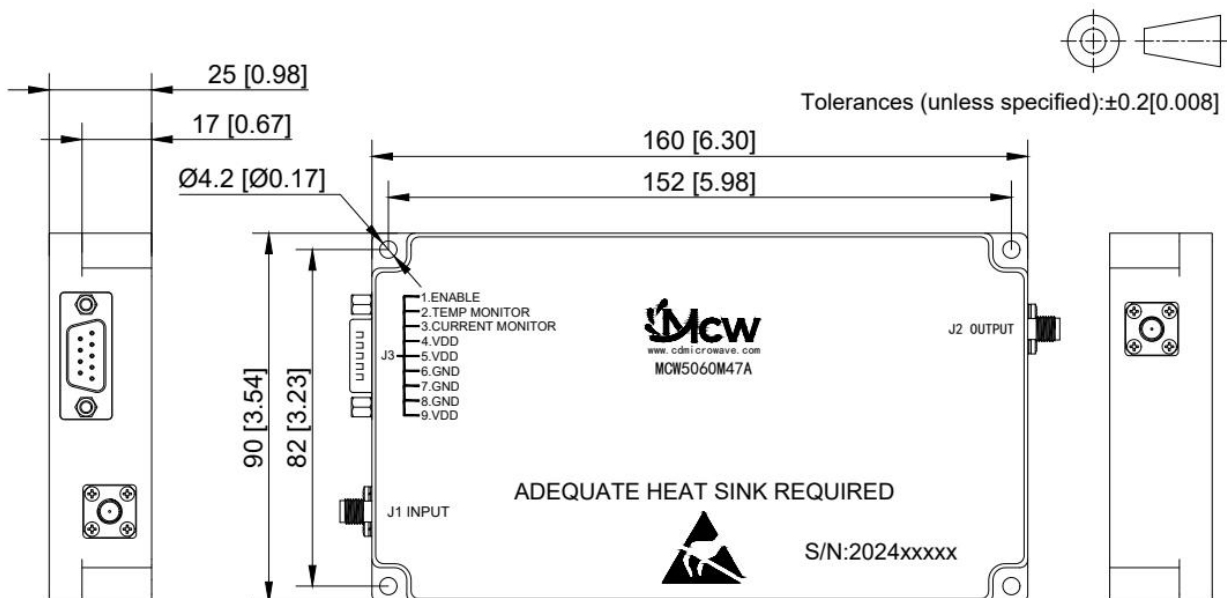

## 5000-6000MHz/50Watt/Module

Model Number: MCW5060M47A

### TYPICAL PERFORMANCE PLOTS (for reference only)

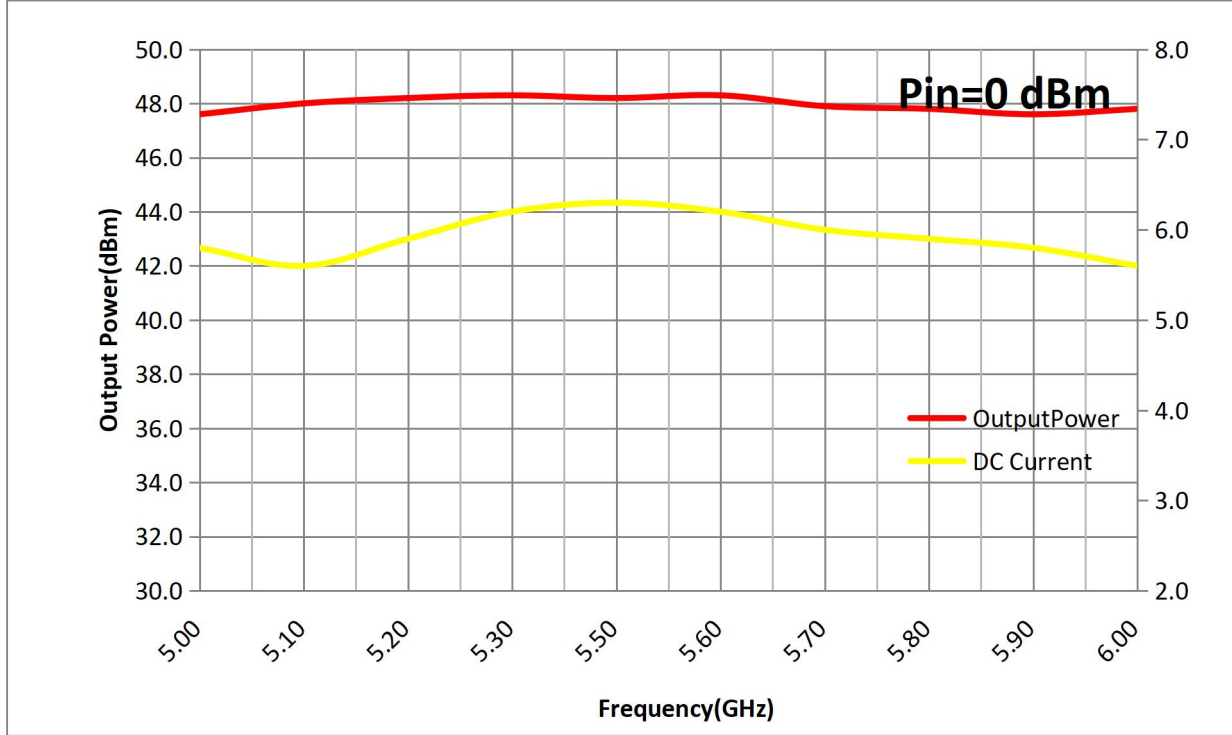

### Important Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with [Chengdu Microwave Technology Co., Ltd](http://Chengdu Microwave Technology Co., Ltd) sales team or E-mail to [info@cdmicrowave.com](mailto:info@cdmicrowave.com) if you have any more questions.

\*Chengdu Microwave Technology Co., Ltd\*

>>1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel: +86(28)87872669\*0

>>Fax: +86(28)87882925

>>Mobile/WhatsApp: +86-181 8078 9271

>>E-mail: [info@cdmicrowave.com](mailto:info@cdmicrowave.com)

>>[www.cdmicrowave.com](http://www.cdmicrowave.com)